

DETERMINATION OF “ m_i ” IN THE HOEK–BROWN FAILURE CRITERION OF ROCK

Shobeir ARSHADNEJAD*

Department of Mining Engineering, Mahallat Branch, Islamic Azad University, Mahallat, Iran

Abstract: The m_i is an important parameter in the use of the Hoek–Brown failure criterion. It can be estimated using a triaxial compressive strength test but in many projects there is no actual test result for the parameter. An estimation of m_i comes from a reference table giving a constant value. Elsewhere some empirical equations for the value were suggested in the 1990s. Applying these equations is limited use since they are available for a few rock types and the equations are based on just uniaxial compressive strength tests of rock. In this research rocks were divided into three categories (Igneous, Sedimentary and Metamorphic) and three empirical formulas are suggested for the categories based on uniaxial compressive strength (σ_{ci}) and tensile strength (σ_t) of rocks by nonlinear regression. The equations have been obtained by a combination of the two independent parameters and the trial and error method was used to find the equations with the highest correlation coefficient. The data base uses data from many original international research projects and much data from Iranian tunnelling projects. The models have a high level of accuracy and have been used to describe most rock types although the authors know that the technique can be improved using a new and larger collection of data in the future.

Keywords: *Hoek–Brown criterion, m_i , rock strength, regression, empirical model*

1. INTRODUCTION

The uniaxial compressive strength value is a useful criterion in predicting rock failure in a uniaxial field stress. But when there is a triaxial field stress, we need a mathematical function which considers all three principal stresses to find the rock fracturing boundary. This function is a failure envelope which can be obtained using

Corresponding author: e-mail address: s_arshadnejad@yahoo.com (S. ARSHADNEJAD)

a mathematical analysis or through an empirical approach. Six recent studies have shown (Sheory 1997) that empirical models using a nonlinear form have a better agreement with experiences.

There are a number of models that describe the compressive failure envelope rock mass but the most famous practical model is that proposed by Hoek and Brown. Most of the famous models are shown in Table 1.

Table 1. Important empirical intact rock failure criterion

No.	Models	References
1	$(\sigma_1 - \sigma_3)^2 = a + b(\sigma_1 + \sigma_3)$	Fairhurst 1964
2	$\sigma_1 = \sigma_c + \sigma_3 + a\sigma_3^b$	Hobbs 1964
3	$\sigma_1 = \sigma_c + a\sigma_3^b$	Murrel 1965
4	$\sigma_1 = \sigma_c + \sigma_3 + a\sigma_3$	Bodonyi 1970
5	$\sigma_1 = \sigma_3 + a(\sigma_1 + \sigma_3)^b$	Franklin 1971
6	$\frac{\sigma_1}{\sigma_c} = a + b \left[\frac{\sigma_3}{\sigma_c} \right]^\alpha$	Bieniawski 1974 Yudhbir et al. 1983
7	$\sigma_1 = \sigma_3 + \sigma_c \left(m \frac{\sigma_3}{\sigma_c} + s \right)^{\frac{1}{2}}$	Hoek & Brown 1980
8	$\sigma_1 = \sigma_3 + B\sigma_c \left(\frac{\sigma_c}{\sigma_3} \right)^\alpha$	Ramamurthy et al. 1985
9	$\frac{\sigma_1}{\sigma_c} = \left[\left(\frac{M}{B} \right) \left(\frac{\sigma_3}{\sigma_c} \right) + 1 \right]^{\frac{1}{B}}$	Johnston 1985
10	$\sigma_1 + \sigma_3 \left[1 + \frac{\sigma_3}{\sigma_t} \right]^b$	Balmer 1952 Sheory et al. 1989
11	$\sigma_1 = \sigma_3 + A\sigma_c \left[\frac{\sigma_3}{\sigma_c} - S \right]^{\frac{1}{B}}$	Yoshida 1990
12	$\sigma_1 = \sigma_3 + (\sigma_3 + \sigma_t) B \left[\frac{\sigma_c}{\sigma_3 + \sigma_t} \right]^\alpha$	Ramamurthy 2001
13	$\sigma_1 = \sigma_3 + \sigma_c \left(m_i \frac{\sigma_3}{\sigma_c} + 1 \right)^\alpha$	Hoek et al. 2002
14	$\frac{\sigma_1}{\sigma_c} = 1 + m \left(\frac{\sigma_3}{\sigma_c} \right)^{0.5}$	Mogi 2007
15	$\sigma_1 = (\sqrt{\sigma_3} + \sqrt{\sigma_c})^2$	You 2011

2. ROCK CONSTANT IN HOEK-BROWN CRITERION

The currently most famous of these empirical rock failure criteria is the Hoek–Brown criterion, and it is used in many rock mechanical software packages, such as Phase2, FLAC, UDEC, PLAXIS. The criterion has been improved several times in papers given in 1983, 1988, 1992, 1995 and 2002. These improvements have increased the accuracy of rock failure prediction. The final generalized form of the model for rock mass is as follows (Hoek et al. 2002):

$$\sigma_1 = \sigma_3 + \sigma_{ci} \left(m_b \frac{\sigma_3}{\sigma_{ci}} + S \right)^a \quad (1)$$

where, m_b , S and a are rock constants and S is one and a is 0.5 for intact rocks. The basic equation that Hoek & Brown proposed to describe intact rock is as follow (Hoek & Brown 1980):

$$\sigma_1 = \sigma_3 + \sigma_{ci} \left(m_i \frac{\sigma_3}{\sigma_{ci}} + 1 \right)^{0.5} \quad (2)$$

where m_b is a rock mass constant which it has been evaluated based on the m_i value. The m_i is determined by a regression analysis based on the principal stresses at failure (Eqs. (11)–(19)). Other simple way to obtain the m_i is by using a reference table (Hoek et al. 1995) & (Roclab 2007). The parameter depends upon the mineralogy, composition and grain size of the intact rock (Hoek et al. 2002).

The m_b , S and a values can be calculated by an empirical equation (Hoek et al. 2002) and also they can be determined knowing the peak and residual strength conditions of the rock mass. In fact m_b is a reduced value of the rock constant (m_i) which can be estimated (Hoek et al. 2002) by:

$$m_b = m_i \exp \left(\frac{GSI - 100}{28 - 14D} \right) \quad (3)$$

S and a are also estimate for rock mass as follows:

$$S = \exp \left(\frac{GSI - 100}{9 - 3D} \right) \quad (4)$$

$$a = 0.5 + \frac{1}{\left(e^{\frac{GSI}{15}} - e^{\frac{20}{3}} \right)} \quad (5)$$

where GSI is a rock mass classification system (Geological Strength Index) and D is disturbance factor which depends upon the degree of disturbance of the rock mass as a result of blasting or due to impact damage or stress relaxation. The value of the parameter is between zero for an undisturbed rock mass and one for a completely disturbed rock mass. It is usually applied to the zone of disturbed (damaged) rock mass, around a tunnel, limited to a range between 1 and 3 meters. Equations 3 to 5 evaluate the peak strength of the rock mass. Cai and his colleagues (Cai et al. 2007) introduced some empirical models to evaluate GSI in residual condition (GSI_r) and also m_r , S_r and a_r are as follows:

$$GSI_r = GSIe^{-0.0134GSI} \quad (6)$$

$$m_r = m_i \exp\left(\frac{GSI_r - 100}{28}\right) \quad (7)$$

$$S_r = \exp\left(\frac{GSI_r - 100}{9}\right) \quad (8)$$

$$a_r = 0.5 + \frac{1}{\frac{1}{6}\left(e^{\frac{GSI_r}{15}} - e^{\frac{20}{3}}\right)} \quad (9)$$

$$\sigma_1 = \sigma_3 + \sigma_{ci} \left(m_r \frac{\sigma_3}{\sigma_{ci}} + S_r \right)^{a_r} \quad (10)$$

The three main independent parameters are the m_i , GSI and D values. GSI has been updated several times in 1995, 1998 (Hoek et al. 1995; 1998) and 2002 (Sonmez & Ulusay 2002), 2004 (Cai et al. 2004), 2009 (Russo 2009) and finally in 2013 by Hoek and his colleagues (Hoek et al. 2013). The Value of D was introduced by Hoek (Hoek et al. 2002) as a reference table and also more recently has been developed as an equation and a graph (Sonmez & Ulusay 2002). But methods to derive m_i have not been updated into a new form. The authors have tried to introduce three empirical formulae to calculate m_i for igneous, sedimentary and metamorphic rocks. These models are based on more than one hundred real data sets. Figure 1 illustrates the effect of different values of the constant m_i upon the Mohr failure envelope for intact rock ($S = 1$ and $a = 0.5$) where σ_{ci} is equal to one.

Hoek and Brown showed two graphs for estimating m_i , first using GSI vs. ratio of the cohesive strength and uniaxial strength of intact rock and second using GSI vs. internal friction angle of the rock mass but they are not sufficiently accurate (Fig. 2). The value of the m_i can be evaluated using data (five or more tests) from triaxial tests. The tests should be carried out over a confining stress range from zero to one half of

the uniaxial compressive strength of the rock sample (Hoek & Brown, 1997). Equation 2 was then changed to allow a linear regression analysis (Eq. (11)).

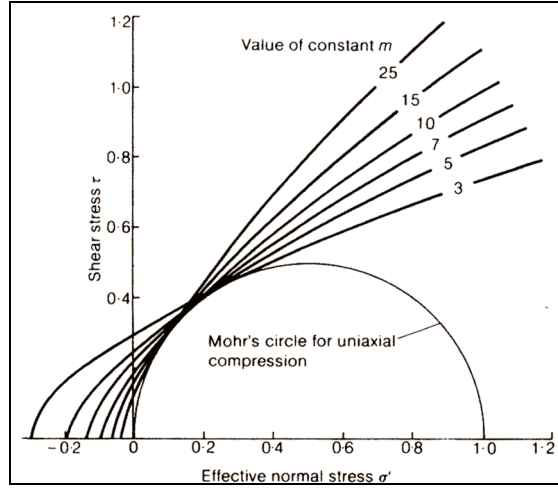


Fig. 1. Effect of m_i value on shape of the Mohr failure envelope (Hoek 1983)

$$(\sigma_1 - \sigma_3)^2 = S\sigma_{ci}^2 + m_i\sigma_{ci}\sigma_3 \quad (11)$$

$$y = A + Bx \quad (12)$$

$$y = \sigma_3 \quad (13)$$

$$y = (\sigma_1 - \sigma_3)^2 \quad (14)$$

$$A = S(\sigma_{ci}^2) \quad (15)$$

S is one for intact rock and then:

$$\sigma_{ci} = \sqrt{A} \quad (16)$$

$$B = m_i\sigma_{ci} \Rightarrow m_i = \frac{B}{\sigma_{ci}} \quad (17)$$

$$a = \frac{\sum y}{n} - \left[\frac{\sum xy - \left(\frac{\sum x \sum y}{n} \right)}{\sum x^2 - \left(\frac{(\sum x)^2}{n} \right)} \right] \frac{\sum x}{n} \quad (18)$$

$$B = \frac{\Sigma xy - \left(\frac{\Sigma x \Sigma y}{n}\right)}{\Sigma x^2 - \left(\frac{\Sigma x^2}{n}\right)} \tag{19}$$

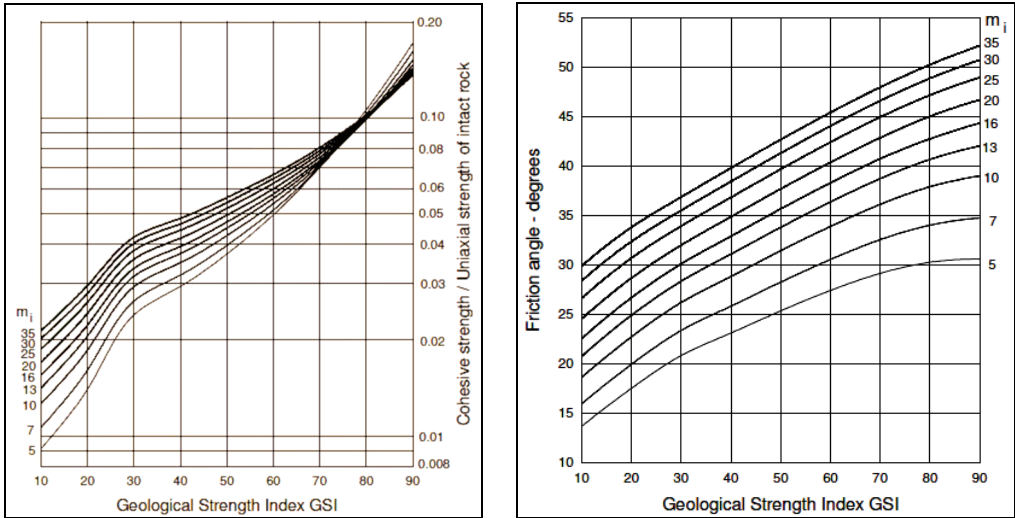


Fig. 2. Relationship between ratio of $\frac{C}{\sigma_{ci}}$ and GSI and also between ϕ and GSI (Hoek & Brown 1997)

Another method to estimate of m_i is through empirical models, Hosseini illustrated that m_i has a relationship with the rock uniaxial compressive strength (Hosseini 1993). He used empirical data from different references from other scientists to carry out non-linear regression and suggested seven equations describing the mechanical behavior for claystone, coal, granite, granodiorite, limestone, sandstone and shale.

3. THE EFFECT OF “ m_i ” ON THE SIZE OF THE PLASTIC ZONE IN TUNNELS

Examining Eqs. (1), (2) and (3) it is clear that there is a non-linear relationship between m_i and σ_1 . The importance of the m_i can be seen by considering the stress analysis of surface and underground spaces. As a primary example consider rock mass around a typical road tunnel. The depth of the tunnel is 100 meters and its diameter and height are 12.2 and 8 meters, respectively. The tunnel is unsupported which will provide a maximum size for the plastic zone. The rock substance strength is assumed

to have a typical average value shown in Tables 2 and 3 and the applied field stress is hydrostatic ($K = 1$).

Table 2. Intact rock and rock mass properties

σ_{ci} (MPa)	E_i (MPa)	GSI	D	γ (kN/m ³)	E_m (MPa)
30	10000	30	0	27	810

Table 3. Constant values of the Hoek-Brown criterion in this research (Peak and residual strength)

Peak strength				Residual strength		
m_i	m_b	S	a	m_r	S_r	a_r
5	0.410	0.0004	0.522	0.228	0.00014	0.544
10	0.821	0.0004	0.522	0.575	0.00014	0.544
15	1.230	0.0004	0.522	0.864	0.00014	0.544
20	1.640	0.0004	0.522	1.150	0.00014	0.544
25	2.052	0.0004	0.522	1.440	0.00014	0.544
30	2.460	0.0004	0.522	1.730	0.00014	0.544

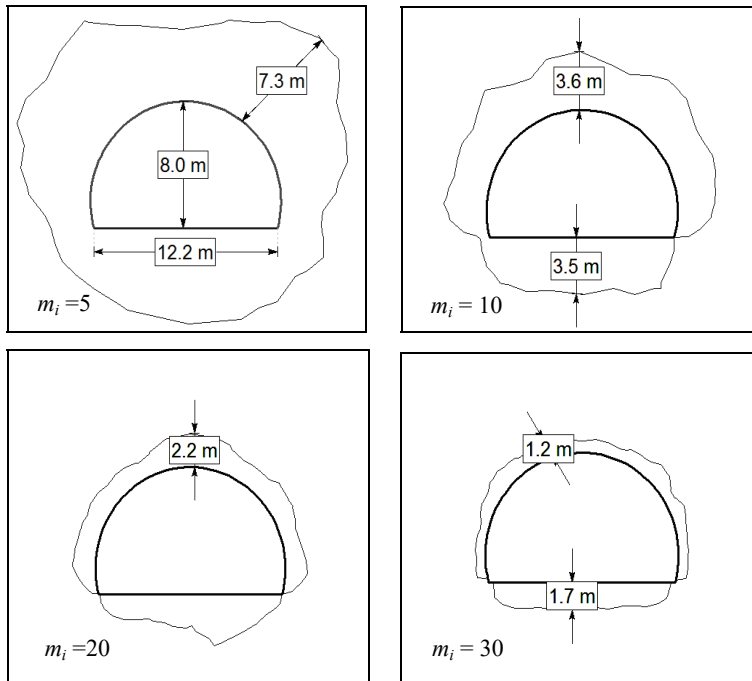


Fig. 3. Influence of the m_i on the size of yielding zone around a tunnel

Residual Strength parameters have been calculated using the Eqs. (6)–(9) which proposed by Cai and his colleagues (Cai et al. 2007). A wide range of values were selected for m_i from 5 to 30 (5, 10, 15, 20, 25, and 30), from which the size of the plastic zone was calculated using a finite element software (Phase²) which models the elasto-plastic behavior of rock and soil into the post failure condition, by considering residual strength parameters. Figure 3 illustrates some results of the numerical modeling with different values of the m_i and a graph has been plotted in Figure 4 showing the influence of the m_i on size of yielding zone (plastic zone).

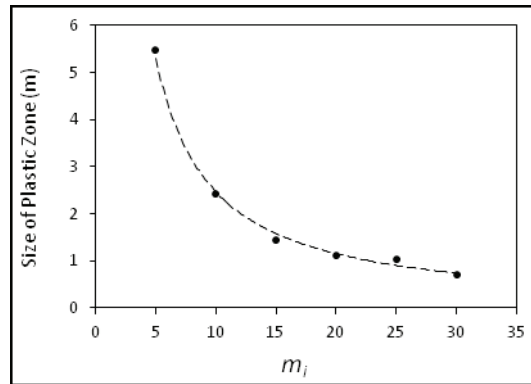


Fig. 4. Variation of m_i versus plastic zone

4. STATISTICAL ANALYSIS TO EVALUATE “ m_i ”

Collection of accurate data on the triaxial compressive strength of different rocks is difficult and expensive. The author has collected significant volumes of data for three types of rocks from several important references. Some data comes from Iranian tunnel projects (Ettehad Rah Co. 2015; Ettehad Rah Co. 2008; Iranoston Co. 2012; Pars Co. 2014; Rahvar e Iran Co. 2014) and many of them are from several other researchers around the world (Akai et al. 1970; Aldritch 1969; Attewell & Sandford 1974; Barat 1995; Betourney et al. 1991; Borecki et al. 1982; Brace 1964; Broch 1974; Chan et al. 1972; Dayre & Giraud 1986; Donath 1964; Everling 1960; Franklin & Hoek 1970; Gnirk & Cheatham 1965; Hareland et al. 1993; Hobbs 1964; Hobbs 1970; Hoek 1983; Hoshino et al. 1972; Hoskins 1969; Hosseini & Vutukuri 1993; Jaeger 1970; Johnston 1985; Johnson et al. 1987; Kovari & Tisa 1975; Kwasniewski 1983; Misra 1972; Mogi 1965; Mogi 1966; Murrel 1965; Ouyang & Elsworth 1991; Ramamurthy 1989; Ramez 1967; Rao et al. 1983; Shea-Albin et al. 1991; Sheory et al. 1989; Shimada, et al. 1983; Singh 1995; Vutukuri & Farough Hosseini 1993; Wang & Kemeny 1995; Wilhelmi & Somerton 1967). However it should be noted that most of the data has

come from an especial reference entitled “Empirical rock failure criteria” (Sheory 1997).

The data includes two independent parameters (uniaxial compressive strength (σ_{ci}) and tensile strength (σ_t)) as well as the dependent parameter (m_i). Scattering of the points were poor quality when the plot was just between m_i and σ_{ci} or m_i and σ_t . An initial attempt to find a regression between the two independent parameters was not enough successful, when it looked at the full data field (Fig. 5). A simple and primary equation for all data as a first attempt suggested as follow:

$$y = 1.8575x^{-0.893} \tag{20}$$

$$\frac{\ln m_i}{\frac{\sigma_{ci}}{\sigma_t}} = 1.8575 \left(\frac{\sigma_{ci}}{\sigma_t} \right)^{-0.893} \tag{21}$$

$$\ln m_i = 1.8575 \left(\frac{\sigma_{ci}}{\sigma_t} \right)^{0.107} \tag{22}$$

$$m_i = e^{1.858 \left(\frac{\sigma_{ci}}{\sigma_t} \right)^{0.107}} \tag{23}$$

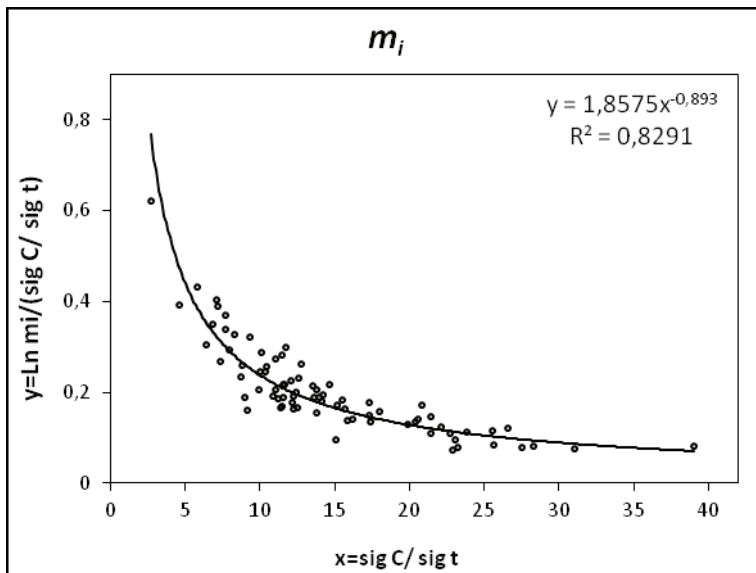


Fig. 5. Regression graph for all type of rocks

The data was then divided into the three categories of rock: sedimentary, metamorphic and igneous. This trial and error approach gave the best combination for the two parameters (σ_{ci} , σ_t) (in more than thirty cases) as an individual independent parameter and, as a result, is suggested with the following equation.

For igneous rocks:

$$m_i = e^{-\left[1.2 \left(\frac{\sigma_{ci} - 2\sigma_t}{\sigma_t}\right)^{0.30}\right]} \tag{24}$$

$$r^2 = 0.961$$

where m_i is the constant of intact rock in Hoek–Brown criterion, σ_{ci} is the uniaxial compressive strength of intact rock in MPa and σ_t is the tensile strength of intact rock in MPa. The number of cases to generate the regression analysis was 27 and the graph of the curve is shown in Figure 6. Figure 7 shows the cross value graph between the measured and estimated data.

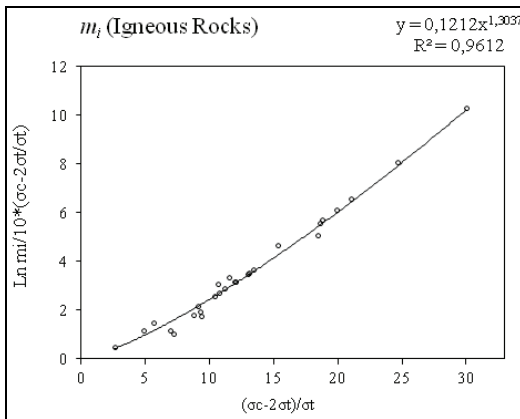


Fig. 6. Regression graph for igneous rocks

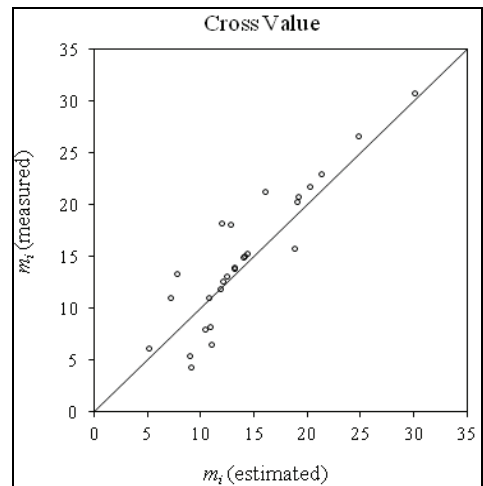


Fig. 7. Cross value graph for igneous rocks

For sedimentary rocks:

$$m_i = e^{-\left[1.3 \left(\frac{\sigma_{ci} - 2.5\sigma_t}{\sigma_t}\right)^{0.26}\right]} \tag{25}$$

$$r^2 = 0.9884$$

The number of cases used for the regression analysis was 59. Figures 8 and 9 show the regression curve and the cross value graph, respectively.

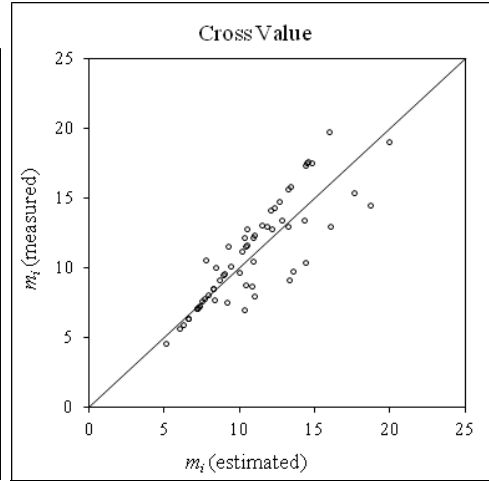
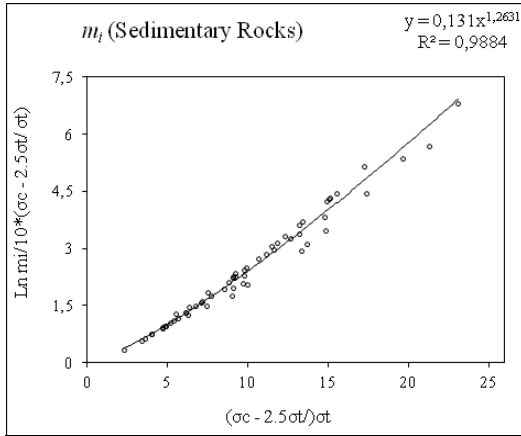


Fig. 8. Regression graph for sedimentary rocks

Fig. 9. Cross value graph for sedimentary rocks

For metamorphic rocks:

$$m_i = e^{\left[1.3 \left(\frac{\sigma_{ci} - 1.5 \sigma_t}{\sigma_t} \right)^{0.28} \right]} \quad (26)$$

$$r^2 = 0.993$$

The number of cases for the regression analysis was 21. Figures 10 and 11 show the regression curve and the cross value graph for these rocks (metamorphic), respectively.

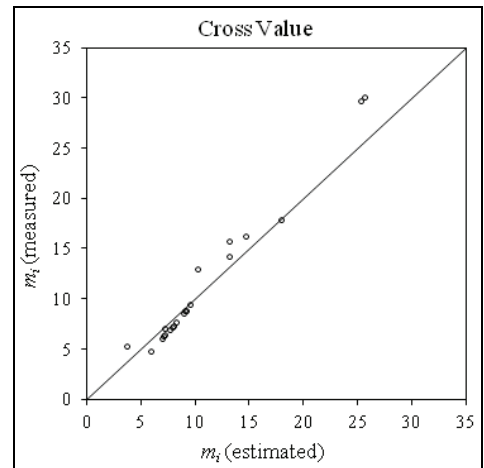
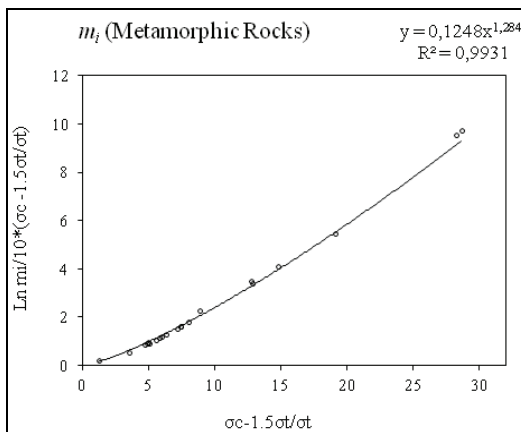


Fig. 10. Regression graph for metamorphic rocks

Fig. 11. Cross value graph for metamorphic rocks

The relationship can be written as a generalized formula as shown below or can be found using a table for the constant values of the model such as shown in Table 4. List of rock types used in the analysis is in Table 5.

$$m_i = e^{-\left[a \left(\frac{\sigma_{ci} - b\sigma_i}{\sigma_i} \right)^c \right]} \tag{27}$$

Table 4. Constant values for the suggested models

Rock category	<i>a</i>	<i>b</i>	<i>c</i>
Igneous	1.2	2	0.30
Sedimentary	1.3	2.5	0.26
Metamorphic	1.3	1.5	0.28

Table 5. Different types of rock in the analysis

Rock category	Type of rocks
Igneous	Granite, Granodiorite, Granite Breccia, Diorite, Lamprophyre, Agglomerate Tuff, Basalt, Rhyolite, Quartz Diorite, Diabase, Gabbro, Tuff, Andesite.
Sedimentary	Sandstone, Limestone, Dolomite, Coal, Siltstone, Shale, Marl, Travertine, Anhydrite.
Metamorphic	Quartzite, Gneiss, Marble, Schist, Slate.

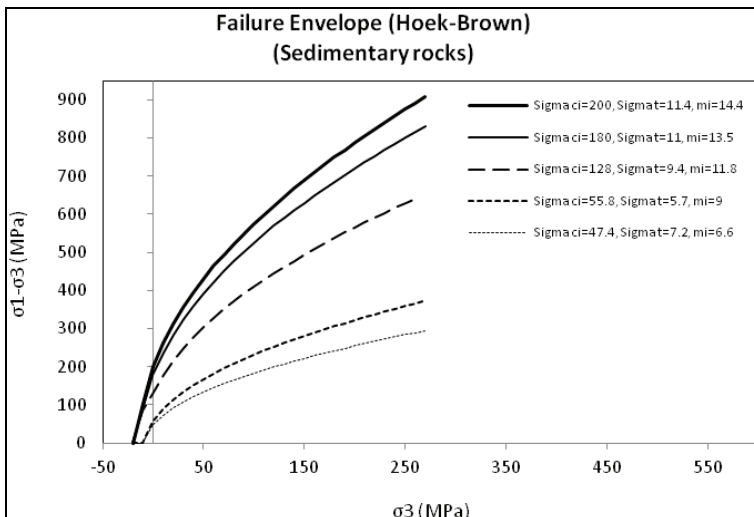


Fig. 12. Failure envelopes for sedimentary rocks

Based on the three suggested models for evaluation of the m_i , failure envelop for each one have been plotted which the graphs for sedimentary rocks has been shown in Figure 12, for igneous rocks has been shown in Figure 13 and finally for metamorphic rocks has been illustrated in Figure 14. The curves are Hoek-Brown failure criteria for intact rock. It means that the parameter S equal one and the parameter a equal 0.5. But m_i has been calculated by the equations 24, 25 & 26 which they have obtained by uniaxial compressive strength and tensile strength of the intact rock for each category.

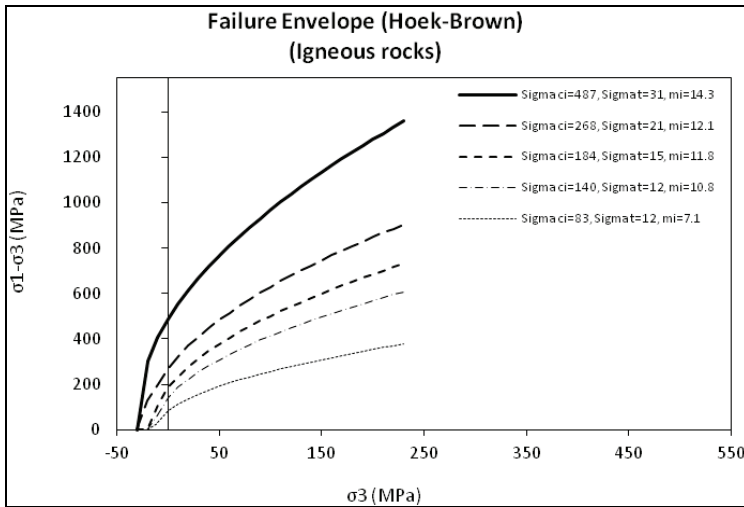


Fig. 13. Failure envelopes for igneous rocks

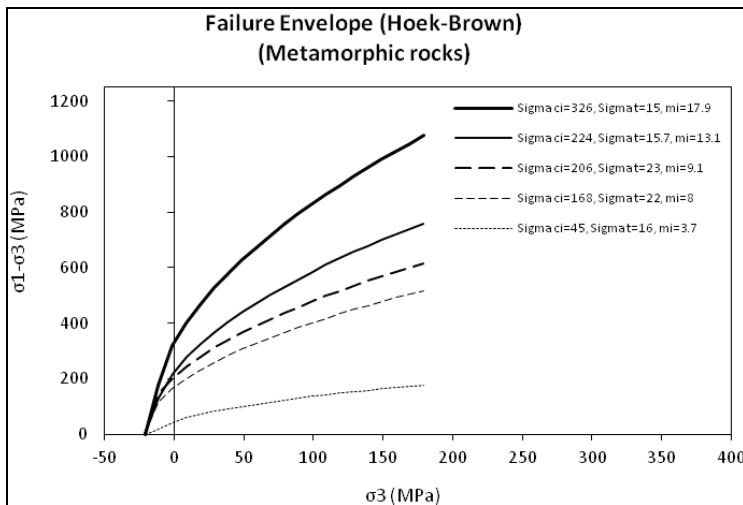


Fig. 14. Failure envelopes for metamorphic rocks

5. CONCLUSIONS

The application of most models (reference tables, graphs and empirical formulae) are limited in their ability to estimate the value of m_i . The author proposes a new model derived from a large database and with rock types divided into three categories (Igneous, Sedimentary and Metamorphic). Three empirical formulae have been suggested for the categories based on a specific combination of uniaxial compressive strength (σ_{ci}) and tensile strength (σ_t) of the intact rock as independent parameters. The equations have been obtained by trial and error to achieve equations found to have a high value for the correlation coefficient (Igneous: 0.961, Sedimentary: 0.988 and Metamorphic: 0.993). The models have thus a high level of accuracy and have been tested to cover most rock types but the author recognizes that this can be improved with larger access to databases in the future.

ACKNOWLEDGMENTS

This research was partially supported by Azad University with research code 123a52.

REFERENCES

- AKAI K., YAMAMOTO K., ARIOKA M., 1970, *Experimental research on the structural anisotropy of crystalline schists*, 2nd Int. Cong. Rock Mech. (ISRM), Belgrade, Vol. 1, 181–186.
- ALDRITCH M.J., 1969, *Pore pressure effects on Berea sandstone subjected to experimental deformation*, Geol. Soc. Amer. Bull., Vol. 80, 1577–1586.
- ATTEWELL P.B., SANDFORD M.R., 1974, *Intrinsic shear strength of a brittle anisotropic rock*, Int. J. Rock Mech. Min. Sci. Geomech. Abstr., Vol. 11, 423–430.
- BALMER G., 1952, *A general analytical solution for Mohr's Envelope*, Proc. Am. Soc. for Testing Materials, Vol. 52, 1260–1271.
- BARAT D., 1995, Personal communication from C.M.R.I., Dhanbad.
- BETOURNEY M.C., GORSKI B., LABRIE D., JACKSON R., GYENGE M., 1991, *New considerations in the determination of Hoek and Brown material constants*, 7th Int. Cong. Rock Mech. (ISRM) (Ed. W. Wittke), Aachen, Vol. 1, 195–200.
- BIENIAWSKI Z.T., 1974, *Estimating the strength of rock materials*, J.S. Afr. Inst. Min. Metall. (SAIMM), Vol. 74, 312–320.
- BODONYI J., 1970, *Laboratory tests of certain rocks under axially symmetrical loading conditions*, 2nd Int. Cong. Rock Mech., ISRM, Belgrade, Vol. 1, 389–397.
- BORECKI M., KWASNIEWSKI M., PACHA J., OLEKSY S., BERSZAKIEWICZ Z., GUZIK J., 1982, *Triaxial compressive strength of two mineralogic/diagenetic varieties of coal measure. fine-medium grained Pniówek and Anna sandstones tested under confining pressure up to 60 MPa*, Prace Instytutu PBKiOP Politechniki Śląskiej, 119/2, Gliwice.
- BRACE W.F., 1964, *Brittle fracture of rocks. State of Stress in the Earth's Crust*, W.R. Judd (Ed.), Elsevier, New York, 695–798.
- BROCH E., 1974, *The influence of water on some rock properties*, Advances in Rock Mechanics. 3rd Int. Cong. Rock Mech., Denver, 2, Part A, 33–38.

- CAI M., KAISER P.K., UNO H., TASAKA Y., MINAMI M., 2004, *Estimation of rock mass strength and deformation modulus of jointed hard rock masses using the GSI system*, Int. J. Rock Mech. Min. Sci., Vol. 41, No. 1, 3–19.
- CAI M., KAISER P.K., TASAKA Y., MINAMI M., 2007, *Determination of residual strength parameters of jointed rock masses using the GSI system*, Int. J. of Rock Mech. and Min. Sci., Vol. 44, 247–265.
- CHAN S.S.M., CROCKER T.J., WARDELL G.G., 1972, *Engineering properties of rocks and rock masses in the deep mines of the Coeur d’Alene Mining District. Idaho*, Trans. Soc. Min. Engrs. of AIME, 252, 353–361.
- DAYRE M., GIRAUD A., 1986, *Mechanical properties of granodiorite from laboratory test*, Eng. Geol. Vol. 23, 109–124.
- DONATH F.A., 1964, *Strength variations and deformational behavior in anisotropic rock. State of Stress in the Earth’s Crust*, W.R. Judd (Ed.), Elsevier, New York, 281–297.
- EBERHARDT E., 2012, *The Hoek. Brown failure criterion*, J. Rock Mech. Rock Eng., Vol. 45, 981–988.
- ETTEHAD RAH Co., 2008, *Geotechnical report of Omidiye-Jayezan tunnel*, Iran, 50.
- ETTEHAD RAH Co., 2015, *Geotechnical report of tunnels*, No. 1, 2, 3, 4, 9, 10 in Patave-Dehdasht, Iran, 255.
- EVERLING G., 1960, *Rock mechanical investigations and basis for determination of rock pressure according to deformation of drill holes*, Gluckauf, Vol. 96, 390–409.
- FAIRHURST C., 1964, *On the validity of the “Brazilian” test for brittle materials*, Int. J. Rock Mech. Min. Sci., Vol. 1, 515–546.
- FRANKLIN J.A., HOEK E., 1970, *Developments in triaxial testing technique*, Rock Mech., Vol. 2, 223–228.
- FRANKLIN J.A., 1971, *Triaxial Strength of rock material*, J. Rock Mech., Vol. 3, 86–89.
- FAROUGH HOSSEINI S.M., VUTUKURI V.S., 1993, *On the accuracy of multifailure triaxial test for the determination of peak and residual strength of rocks*, Aust. Conf. Geotech. Instrumentation and Monitoring in Open pit and underground Mining, T. Szwedzicki (Ed.), Kalgoorlie, 223–228.
- GLUSHKO V.T., KIRNICHANSKIY G.T., 1974, *Engineering Geological Prognosticating of stability of the openings in deep coal mines*, Nedar, Moscow.
- GNIRK P.F., CHEATHAM J.B., 1965, *An experimental study of single bit tooth penetration into dry rock at confining pressures of 0–5000 psi*, J. Soc. Pet. Engrs., Vol. 5, 117–130.
- GOWD T.N., RUMMEL F., 1980, *Effect of confining pressure on the fracture behavior of a porous rock*, Int. J. Rock Mech. Min. Sci. Geomech. Abstr., Vol. 17, 225–229.
- HARELAND G., POLSTON C.E., WHITE W.E., 1993, *Normalized rock failure envelope as a function of grain size*, Int. J. Rock Mech. Min. Sci. Geomech. Abstr., Vol. 30, 715–717.
- HOBBS D.W., 1964, *The strength and the stress strain characteristics of coal in triaxial compression*, J. Geol., Vol. 72, 214–231.
- HOBBS D.W., 1970, *Behavior of broken rocks under triaxial compression*, Int. J. Rock Mech. Min. Sci., Vol. 7, 125–148.
- HOEK E., BROWN E.T., 1980, *Underground excavations in rock*, Institution of Min. Metall., London, 527.
- HOEK E., BROWN E.T., 1980, *Empirical strength criterion for rock masses*, J. Geotechnical Eng. Division, BT9, 1013–1035.
- HOEK E., 1983, *Strength of jointed rock masses*, 23th Rankine Lecture. Geotechnique, Vol. 33, No. 3, 187–223.
- HOEK E., BROWN E.T., 1988, *The Hoek–Brown failure criterion – a 1988 update*, In: J. Curran (Ed.), Proceedings of the 15th Canadian Rock Mech. Sym., University of Toronto, 31–38.
- HOEK E., WOOD D., SHAH S., 1992, *A modified Hoek–Brown criterion for jointed rock masses*, In: J.A. Hudson (Ed.), *Rock characterization*, ISRM Sym. Eurock ’92, Chester, UK, London, 209–213.
- HOEK E., KAISER P.K., BAWDEN W.F., 1995, *Support of underground excavations in hard rock*, A.A. BALKEMA, Rotterdam.

- HOEK E., BROWN E.T., 1997, *Practical estimates of rock mass strength*, Int. J. of Rock Mech. and Min. Sci., Vol. 34, No. 8, 1165–1186.
- HOEK E., MARINOS P., BENISSI M., 1998, *Applicability of the Geological Strength Index (GSI) Classification for very weak and sheared rock masses. The case of the Athens Schist formation*, Bull. Eng. Geol. Env., Vol. 57, No. 2, 51–160.
- HOEK E., CARRANZA-TORRES C.T., CORKUM B., 2002, *Hoek–Brown failure criterion 2002 edition*, In: R. Haumah, W. Bawden, J. Curran, M. Telesnicki (Eds.), Proc. Fifth North American Rock Mech. Sym. (NARMS-TAC), University of Toronto Press, Toronto, 267–273.
- HOEK E., CARTER T.G., DIEDERICHS M.S., 2013, *Quantification of the Geological Strength Index Chart*, 47th US Rock Mech., Sym., ARMA, American Rock Mechanics Association, San Francisco, USA, paper No. 13-762, 1–8.
- HOSSEINI S.M.F., 1993, *Some aspects of the strength characteristics of intact and jointed rocks*, Ph.D. Thesis, University of New South Wales.
- HOSHINO K., KOIDE H., INAMI K., IWAMURA S., MITSUI S., 1972, *Mechanical properties of Japanese tertiary sedimentary rocks under high confining pressures*, Rept. Geol. Survey, Japan, No. 244.
- HOSKINS E.R., 1969, *The failure of thick-walled hollow cylinders of isotropic rock*, Int. J. Rock Mech. Min. Sci., Vol. 6, 99–125.
- ILLNITSKAYA E.I., TEDER R.I., VATOLIN E.S., KUNTYSH M.F., 1969, *Properties of rocks and methods of their determination*, Nedra, Moscow.
- IRANOSTONE Co., 2012, *Geotechnical report of tunnels*, No.1 and No. 2 in Gilavand, Iran, 80.
- JAEGER J.C., 1970, *Behavior of closely jointed rock*, Rock Mechanics – Theory and Practice, 11th U.S. Symp. Rock Mech., W.H. Somerton (Ed.), SME of AIME, New York, 57–68.
- JOHNSON B., FRIEDMAN M., HOPKINS T.N., 1987, *Strength and micro fracturing of Westerly granite extended wet and dry at temperatures to 800 °C and pressures to 200 MPa*, 28th US Symp. Rock Mech, I.W. Farmer, J.J.K. Daeman, C.S. Desai, C.E. Glass, S.P. Newman (Eds.), Tucson, 399–412.
- JOHNSTONE J.W., 1985, *Strength of intact geomechanical materials*, J. Geotech. Eng., 111, 730–749.
- KOVARI K., TISA A., 1975, *Multiple failure state and strain controlled triaxial tests*, Rock Mech., 7, 17–33.
- KWASNIEWSKI M.A., 1983, *Deformational and strength properties of the three structural varieties of carboniferous sandstones*, 5th Int. Cong. Rock Mech. (ISRM), Vol. 1, Balkema, Rotterdam, A 105–A 115.
- MCLAMORE R., GRAY K.E., 1967, *The mechanical behavior of anisotropic sedimentary rocks*, Trans. Amer. Soc. Mech. Engr., Series B, 62–76.
- MISRA B., 1972, *Correlation of rock properties with machine performance*, Ph.D. Thesis, Leeds University.
- MOGI K., 1965, *Deformation and fracture of rocks under confining pressure*, (2): *Elasticity and Plasticity of some rocks*, Bull., Earthquake Res. Inst., Tokyo Univ., 42, 349–379.
- MOGI K., 1966, *Some precise measurements of fracture strength of rocks under uniform compressive stress*, Rock Mech. Eng. Geol., IV, 41–44.
- MOGI K., 2007, *Experimental rock mechanics*, Taylor & Francis, London, UK.
- MURREL S.A.F., 1965, *The effect of triaxial stress systems on the strength of rock at atmospheric temperature*, Geophys. J., 10, 231–281.
- OUYANG Z., ELSWORTH D., 1991, *A phenomenological failure criterion for brittle rock*, Rock Mech. Rock Eng., 24, 133–153.
- PARS Co., 2014, *Geotechnical report of trench Km 18+200 Polsefid-Ghaemshahr*, Iran, 76.
- RAHVAR E IRAN Co., 2014, *Geotechnical report of tunnel No. 3 and No. 4 Polsefid-Ghaemshahr*, Iran, 95.
- RAMAMURTHY T., RAO G.V., RAO K.S., 1985, *A strength criterion for rocks*, Indian Geotech. Conf., Roorkee, 1, 59–64.
- RAMAMURTHY T., 1989, Personal Communication from I.I.T., Delhi.

- RAMAMURTHY T., 2001, *Shear strength response of some geological materials in triaxial compression*, Int. J. Rock Mech., Min, 38, 683–697.
- RAMEZ M.R.H., 1967, *Fractures and strength of sandstone under triaxial compression*, Int. J. Rock Mech. Min. Sci., 4, 257–268.
- RAO K.S., RAO G.V., RAMAMURTHY T., 1983, *Strength anisotropy of a Vindhyan sandstone*, Indian Geotech. Conf., Vol. 1, Madras, VI41–VI48.
- ROCSCIENCE, 2007, *Roclab*, 1.031. Edn., Rocscience, Inc., Toronto.
- RUSSO G., 2009, *A new rational method for calculating the GSI*, Tunneling and Underground Space Technology, 24, 103–111.
- SCHWARTZ A.E., 1964, *Failure of rock in triaxial shear test*, 6th Symp. Rock Mech., Rolla, 109–135.
- SHEA-ALBIN V.R., HANSEN D.R., GERLICK R.E., 1991, *Elastic wave velocity and attenuation as used to define phases of loading and failure in coal*, USBM Rept. Inv. 9355, 43.
- SHEORY P.R., BISWAS A.K., CHOUBEY V.D., 1989, *An empirical failure criterion for rocks and jointed rock masses*, Eng. Geol., 26, 141–159.
- SHEORY P.R., 1997, *Empirical rock failure criteria*, A.A. Balkema.
- SHIMADA M., CHO A., YUKUTAKE H., 1983, *Fracture strength of dry silicate rock at high confining pressure and activity of acoustic emission*, Tectonophysics, 96, 159–172.
- SINGH S.K., 1995, Personal communication from C.M.R.I., Dhanbad.
- SINGH M., SAHU A.K., SRIVASTAVA R.K., TIWARI R.P., 1992, *Evaluation and applicability of strength for rocks: sandstones and quartzites of Mirzapur region*, Asian Regional Sump. Rock Slopes, Oxford and IBH, New Delhi, 117–124.
- SONMEZ H., ULUSAY R., 2002, *A discussion on the Hoek–Brown failure criterion and suggested modifications to the criterion verified by slope stability case studies*, Yerbilimleri, 26, 77–99.
- STOWE R.L., 1969, *Strength and deformation properties of granite, basalt, limestone and tuff at various loading rates*, U.S. Army Corp. Eng., Waterways Exp. Stn., Vicksburg, Miss., Misc. Paper C-69-1.
- VUTUKURI V.S., FAROUGH HOSSEINI S.M., 1993, *Correlation between the effect of confining pressure on compressive strength in triaxial test and the effect of dia/height ratio on compressive strength in unconfined compression test*, 12th Conf. Ground Control in Mining, S.S. Peng (Ed.), Morgantown, 316–321.
- WANG R., KEMENY J.M., 1995, *A new empirical failure criterion for rock under polyaxial compressive stresses*, 35th US Symp. Rock Mech., J.J. Daemen, R.A. Schultz (Eds.), A.A. Balkema, Rotterdam, 453–458.
- WILHELMI B., SOMERTON W.H., 1967, *Simultaneous measurement of pore and elastic properties of rocks under triaxial stress conditions*, J. Soc. Pet. Engrs., 7, 283–294.
- YOSHIDA N., MORGENSTEM N.R., CHAN D.H., 1990, *A failure criterion for stiff soils and rocks exhibiting softening*, Canadian Geotechnical Journal, 27, 2, 195–202.
- YOU M.Q., SU C.D., CHEN X.L., 2011, *Brazilian Splitting strengths of discs and rings of rocks in dry and saturated conditions*, Chinese J. Rock Mech. and Eng., 30, 3, 464–472.
- YUDHBIR, LEMANZA W., PRINZL F., 1983, *An empirical failure criterion for rock masses*, 5th Int. Cong. Rock Mech. (ISRM), 1, A.A. Balkema, Rotterdam, B1–B8.